


## Reverse Band Strut

Part No.

**32710-01**

### Chrysler A404, A413, A470, A670

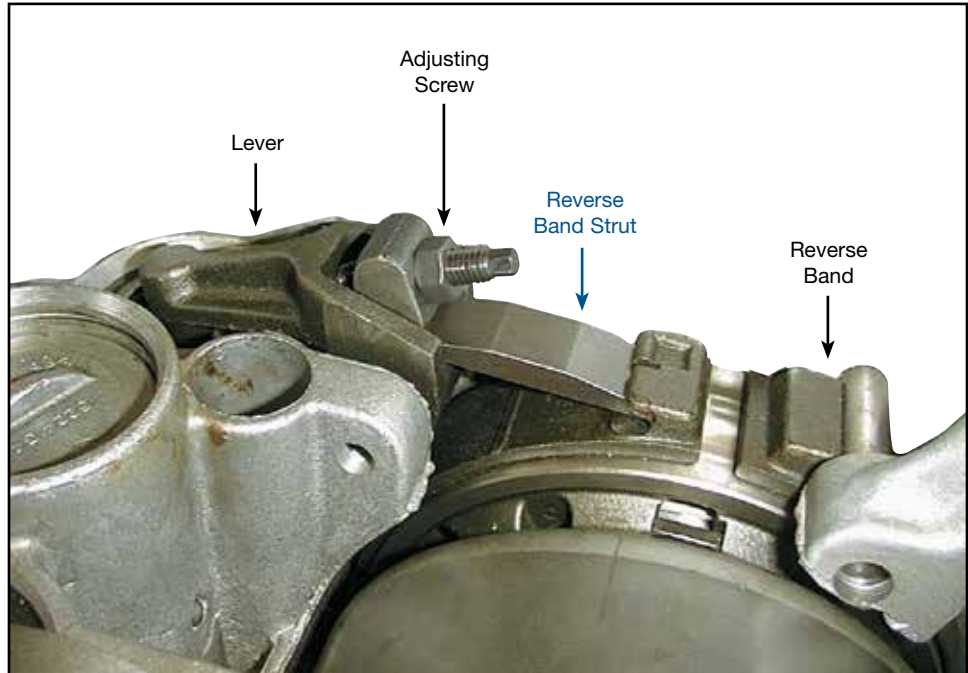

#### 1. Disassembly

- Remove oil pan and valve body, exposing the inside of transmission case.
- Remove adjusting screw from Reverse band lever.
- Remove OE strut and discard.

#### 2. Installation & Assembly

- Insert Sonnax strut with the notched end fitting into the notch on the band and the flat length facing the band.
- Replace OE adjusting screw and set according to the manufacturer's specifications.