

GM 6T70/75/80 (Gen. 2) ZIP KIT®


PART NUMBER 6T70-G2-ZIP

IDENTIFICATION GUIDE



GM Gen. 1 6T70/75

GM Gen. 2 6T70/75/80

TEHCMs

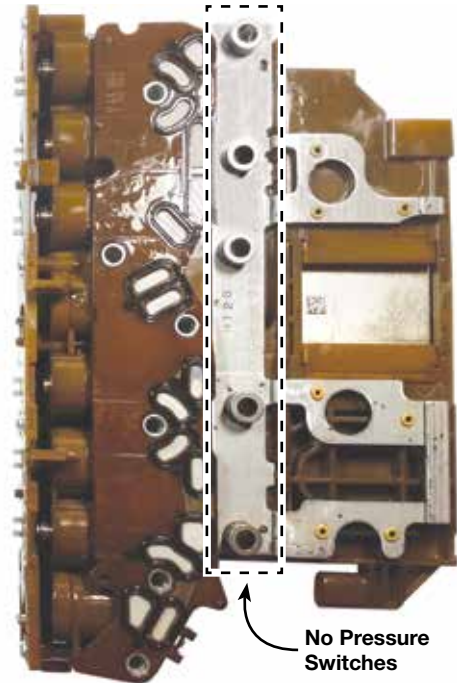


LOWER VALVE BODIES

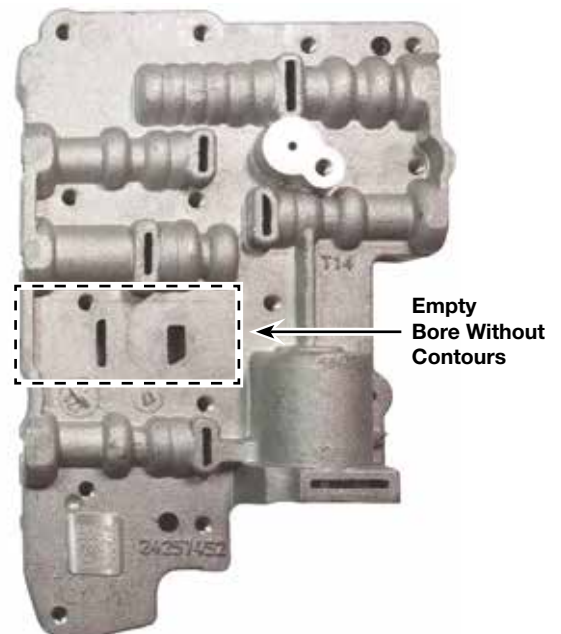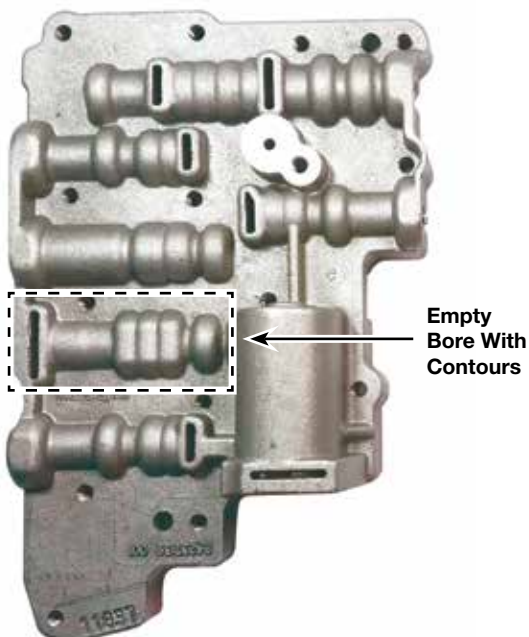


GM Gen. 1 6T70/75

GM Gen. 2 6T70/75/80


SEPARATOR PLATES

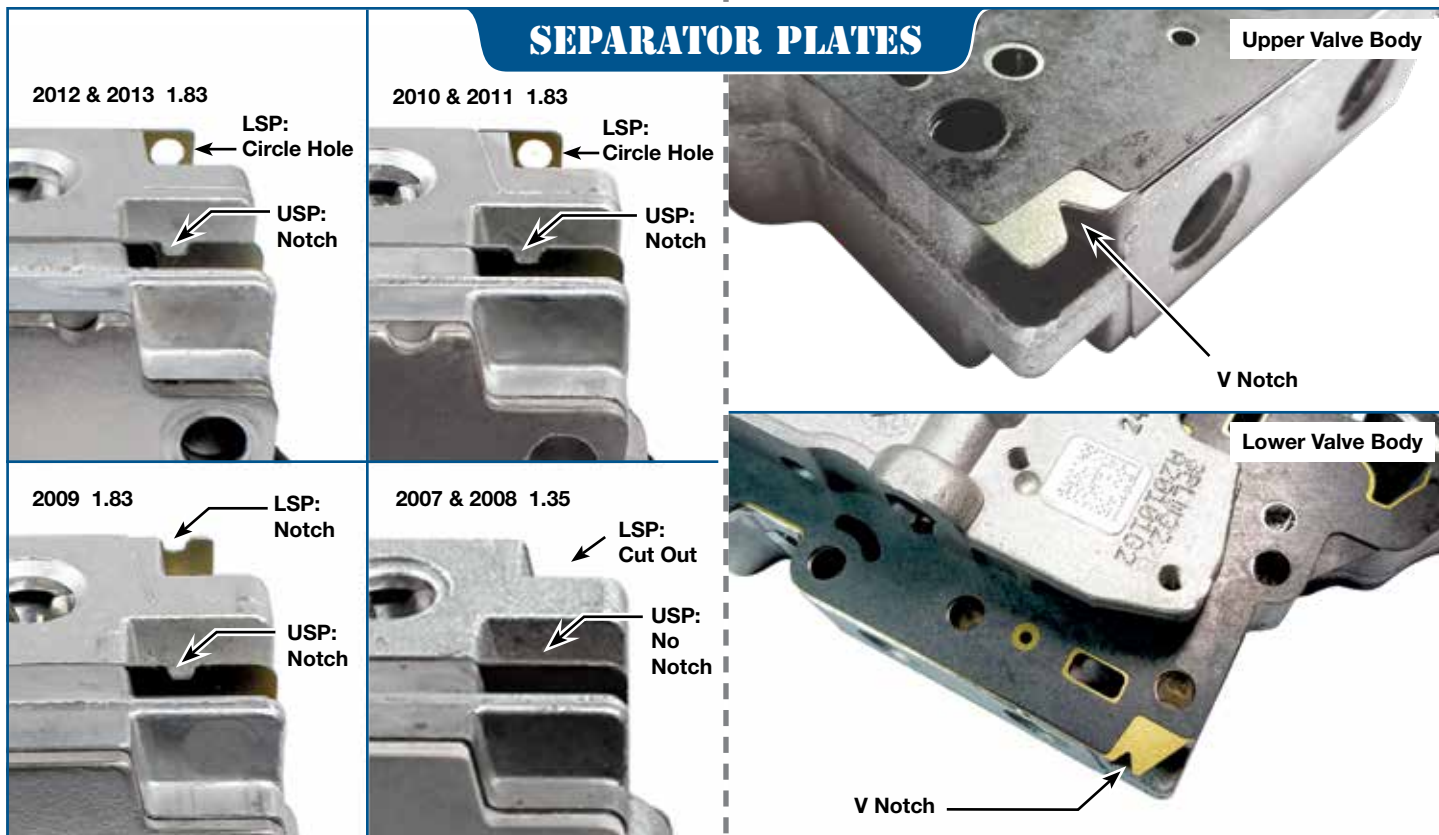

SOLENOID DAMPERS

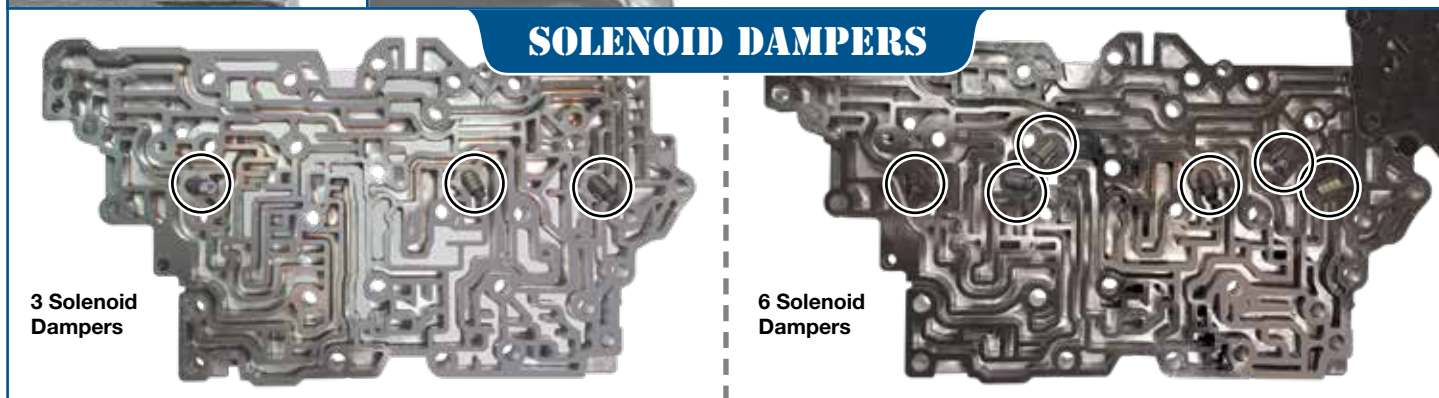

CHECKBALL

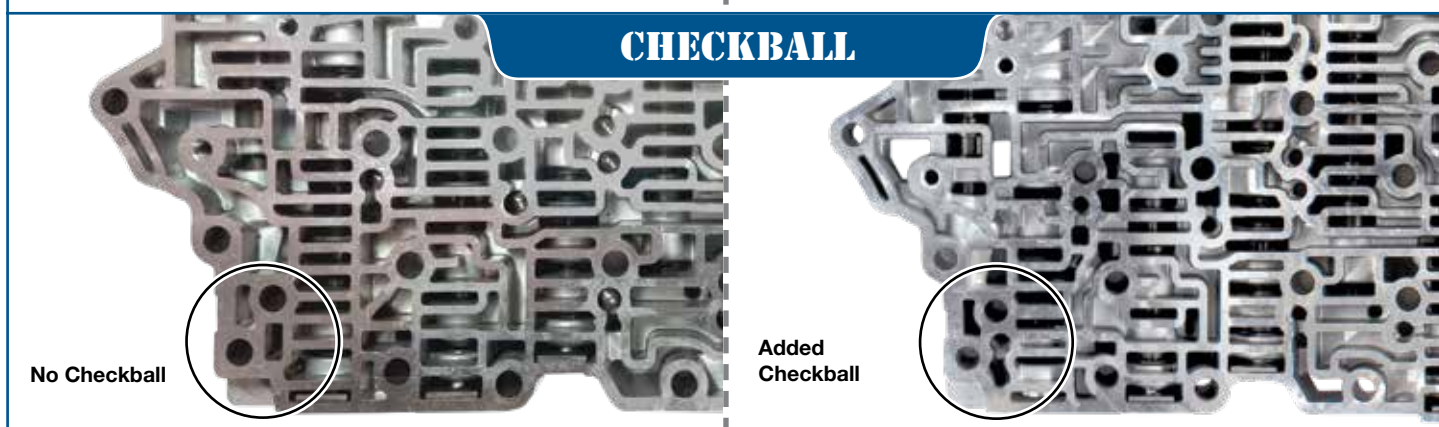



GM 6T70/75/80 (Gen. 2) ZIP KIT®

PART NUMBER 6T70-G2-ZIP


QUICK GUIDE

Parts are labeled here in order of installation. See other side of sheet for details on kit contents.



CAUTION! Ensure shuttle valve is installed with blind bore facing inboard and rounded, closed end facing the end plug.

INSTALLATION DIAGRAM

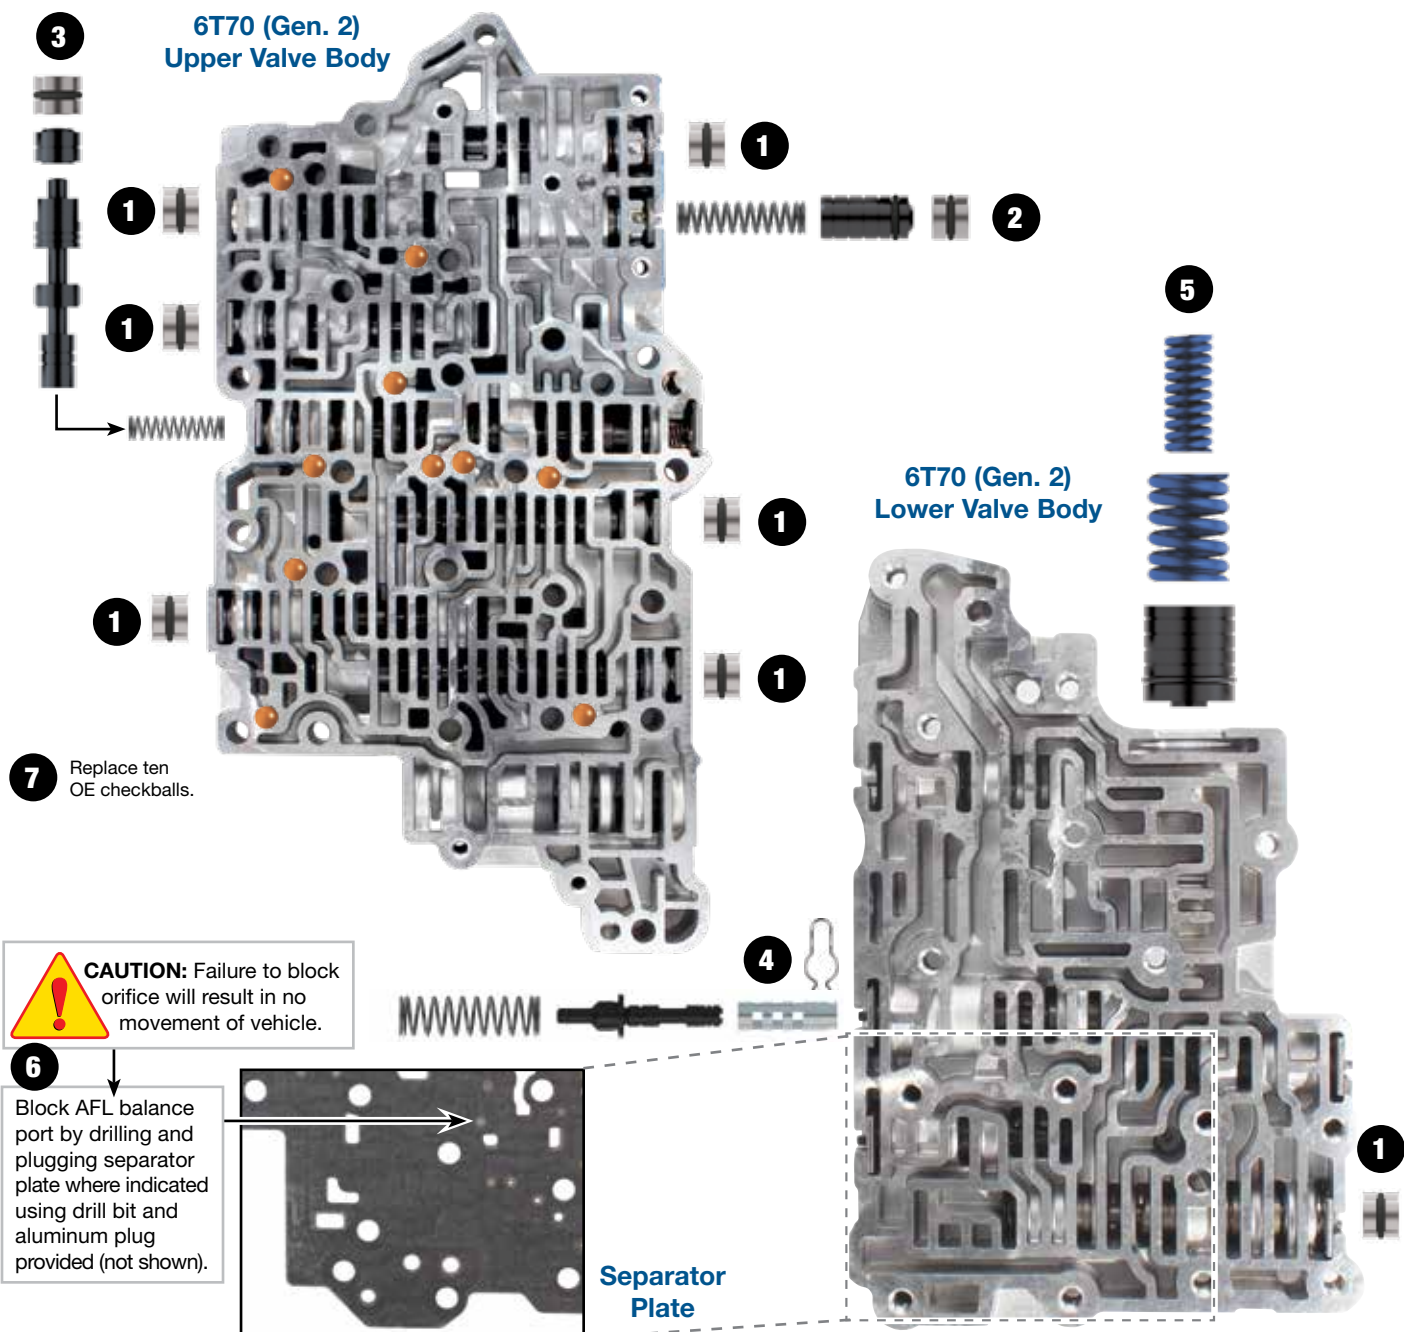

In addition to general rebuilding tips and technical information, the technical booklet included in this kit contains vacuum testing and additional repair options for higher mileage units or for repairing specific complaints which are beyond the scope of this kit.

Step 1 Replace Seven OE End Plugs

Place O-ring into end plug groove. Lubricate with Sonnax Slippery Stick **O-LUBE** and roll on bench to size.

Packaging Pocket 1

- End Plug (7)
- O-Rings (11) 4 Extra

Step 2 Replace OE Isolator Valve & Spring

Place one O-ring into plug groove and one O-ring into isolator valve groove. Lubricate with Sonnax Slippery Stick **O-LUBE** and roll on bench to size.

Packaging Pocket 2

- End Plug
- Valve
- Spring
- O-Rings (3) 1 Extra

Step 3 Replace OE TCC Regulator Apply Valve Bore Lineup

Remove and discard all OE components except the end clip. Save OE end clip for reuse.



CAUTION: Ensure shuttle valve is installed with blind bore facing inboard and rounded, closed end facing the end plug.

Packaging Pocket 3

- TCC Regulator Apply Valve
- Spring
- Shuttle Valve
- End Plug
- O-Rings (2) 1 Extra

Step 4 Replace OE Actuator Feed Limit (AFL) Valve Lineup

Remove and discard OE valve and spring. Keep outboard OE retainer for reuse. Install Sonnax sleeve and valve as illustrated. Secure sleeve into bore by installing Sonnax clip into sleeve groove at inboard port. Install Sonnax spring and secure all components into the bore with OE retainer.

Packaging Pocket 4

- Sleeve
- Valve
- Spring
- Clip

Step 5 Replace OE 4-5-6 Accumulator Piston & Springs

Remove and discard OE piston and springs. Keep OE retainer for reuse. Place O-ring into piston groove. Lubricate with Sonnax Slippery Stick **O-LUBE** and roll on bench to size.

Packaging Pocket 5

- Accumulator Piston
- Spring, Large
- Spring, Small
- O-Rings (2) 1 Extra

Step 6 Block AFL Balance Port

Drill indicated separator plate orifice with included .062" dia. drill bit. Remove any burrs. Insert .062" dia. aluminum plug into drilled hole and peen in place on both sides of plate. Ensure plate will sit flush on both castings. Replace OE checkballs.



CAUTION: Ensure supplied retainer clip is fully seated in AFL sleeve groove after installation


Packaging Pocket 6

- Drill Bit (.062" dia.)
- Aluminum Plugs (2) 1 Extra

Step 7 Replace OE Checkballs

Packaging Pocket 7

- Checkballs, .250" dia. (10)

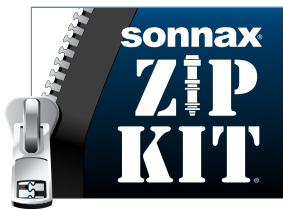

GM 6T70/75/80 (Gen. 2) ZIP KIT®


PART NUMBER 6T70-G2-ZIP

INSTALLATION & TESTING BOOKLET

Valve Body ID & Tech Tips

Adaptive Learning

The 6T70, 6T75 and 6T80 is equipped with several adaptive learning strategies. After valve body service, the existing adaptive values will need to be erased. Then a “Fast Learn” process should be performed. Reference GM material for proper “Fast Learn” process.

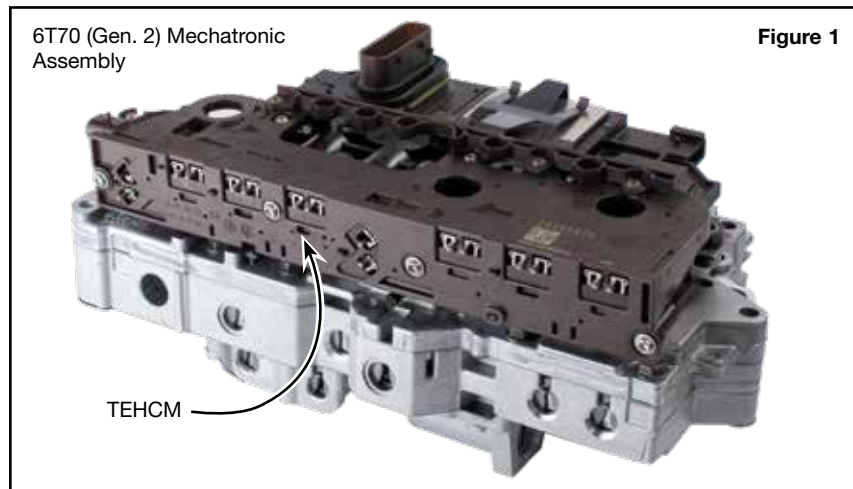

Clutch Apply Chart

Figure 2

Gear	1-2-3-4 Clutch	3-5 Clutch	4-5-6 Clutch	2-6 Clutch	Low & Reverse Clutch	Low & Reverse One-Way Clutch
Park					X	
Reverse		X			X	
Neutral					X	
1st Breaking	X				X	Holding
1st	X					Holding
2nd	X			X		
3rd	X	X				
4th	X		X			
5th		X	X			
6th			X	X		

Solenoid Apply Chart

Figure 3

Gear	Solenoid					
	Shift Solenoid 1	Shift Solenoid 2	1-2-3-4 PC Solenoid 5 NL	2-6 PC Solenoid 4 NL	3-5 Rev. PC Solenoid 2 NH	Low Reverse 4-5-6 PC Solenoid 3 NH
Park	X	X				X
Reverse	X				X	X
Neutral	X	X				X
1st Breaking	X	X	X			X
1st		X	X			
2nd		X	X	X		
3rd		X	X		X	
4th		X	X			X
5th		X			X	X
6th		X		X		X

KEY: X = On/Applied

Zip Kit Instructions

1. Valve Body Removal from Case

- Disconnect shift position switch.
- Disconnect input speed sensor (ISS).
- Disconnect output speed sensor (OSS).
- Remove four control valve body 80mm bolts (yellow). Position TCU spring retainer to the side.
- Remove the remaining seven control valve bolts (Figure 4).
- Remove TEHCM assembly.
- Remove solenoid filter plate (Figure 6) from the back of the TEHCM assembly. Discard and replace, as the seals take a set and will leak if reused.
- Remove the ten control valve body bolts (Figure 7).
- Remove manual shaft detent assembly.
- Remove control valve body from transmission.

2. Disassembly (Figure 8)

Remove the eight control valve body assembly bolts.

3. Installation

Install Zip Kit parts as shown on diagram of separate quick guide sheet included in this Zip Kit. Sonnax recommends vacuum testing critical wear areas not covered by this kit to determine whether additional Sonnax parts are required (see pages 5 & 6).

4. Reassembly

Reassemble valve body and reinstall the eight control valve body assembly bolts (Figure 8). Tighten to 106 in-lb (Figure 5).

5. Valve Body Reinstall to Case

- When reinstalling the manual shaft detent assembly, ensure proper alignment with the lever. Contact with the valve body can cause improper engagement with the lever (Figure 7).
- Reinstall the control valve body and manual shaft detent assembly into the transmission using 10 bolts (Figure 7). Hand tighten, then tighten in the indicated sequence to 106 in-lb (Figure 5).
- Install new solenoid filter plate (Figure 6).
- Reinstall TEHCM assembly and TCU spring retainer.

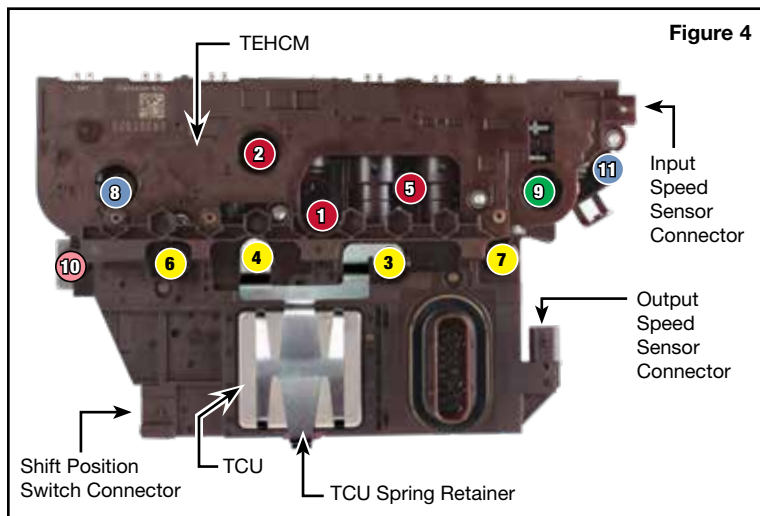


Figure 4

6T70 Disassembly & Reassembly Bolts

Bolt Color Code	Bolt Length	Torque
Orange	35mm	106 in-lb
Green	42mm	
Pink	55mm	
Blue	64mm	
Red	95mm	
Yellow	80mm	

Figure 5

5. Valve Body Reinstall to Case, continued

- e. Reinstall and hand tighten the 11 bolts, then tighten in the indicated sequence to 106 in-lb (**Figure 4**).
- f. Reconnect shift position switch.
- g. Reconnect input speed sensor (ISS).
- h. Reconnect output speed sensor (OSS).



Figure 6

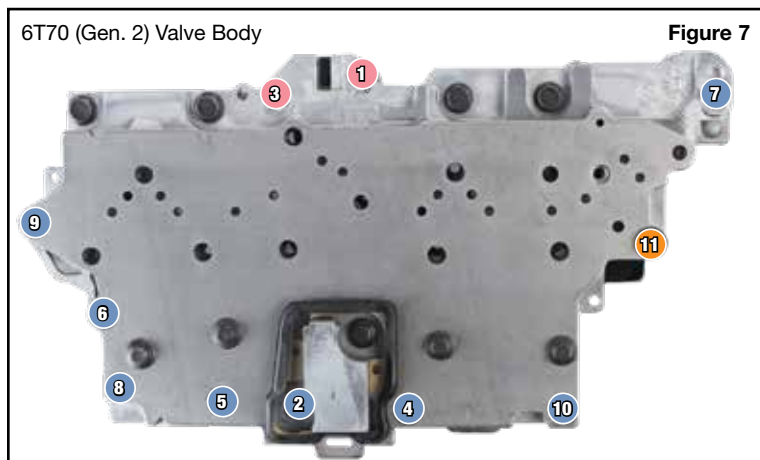


Figure 7

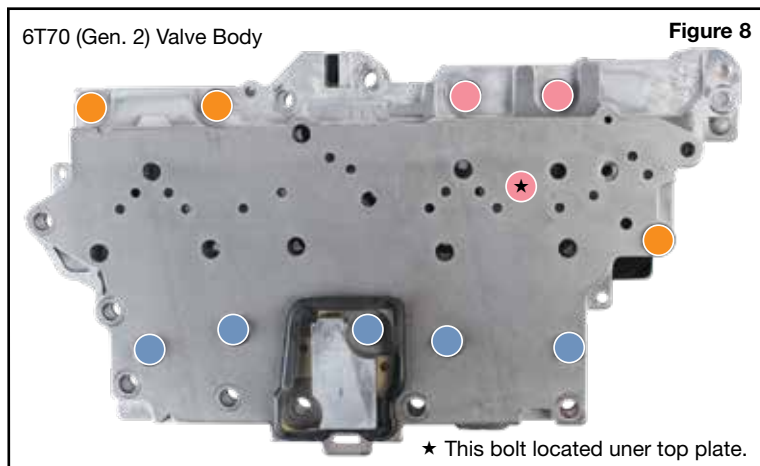


Figure 8


Critical Wear Areas & Vacuum Test Locations




Drop-In Zip Valve™
Parts Available

NOTE: OE valves are shown in rest position and should be tested in rest position unless otherwise indicated. Test locations are pointed to with an arrow. Springs are not shown for visual clarity. Low vacuum reading indicates wear and Sonnax parts are noted for replacement.

Upper Valve Body • 6T70 (Gen. 2)



For specific vacuum test information, refer to individual part instructions included in kits and available at www.sonnax.com.

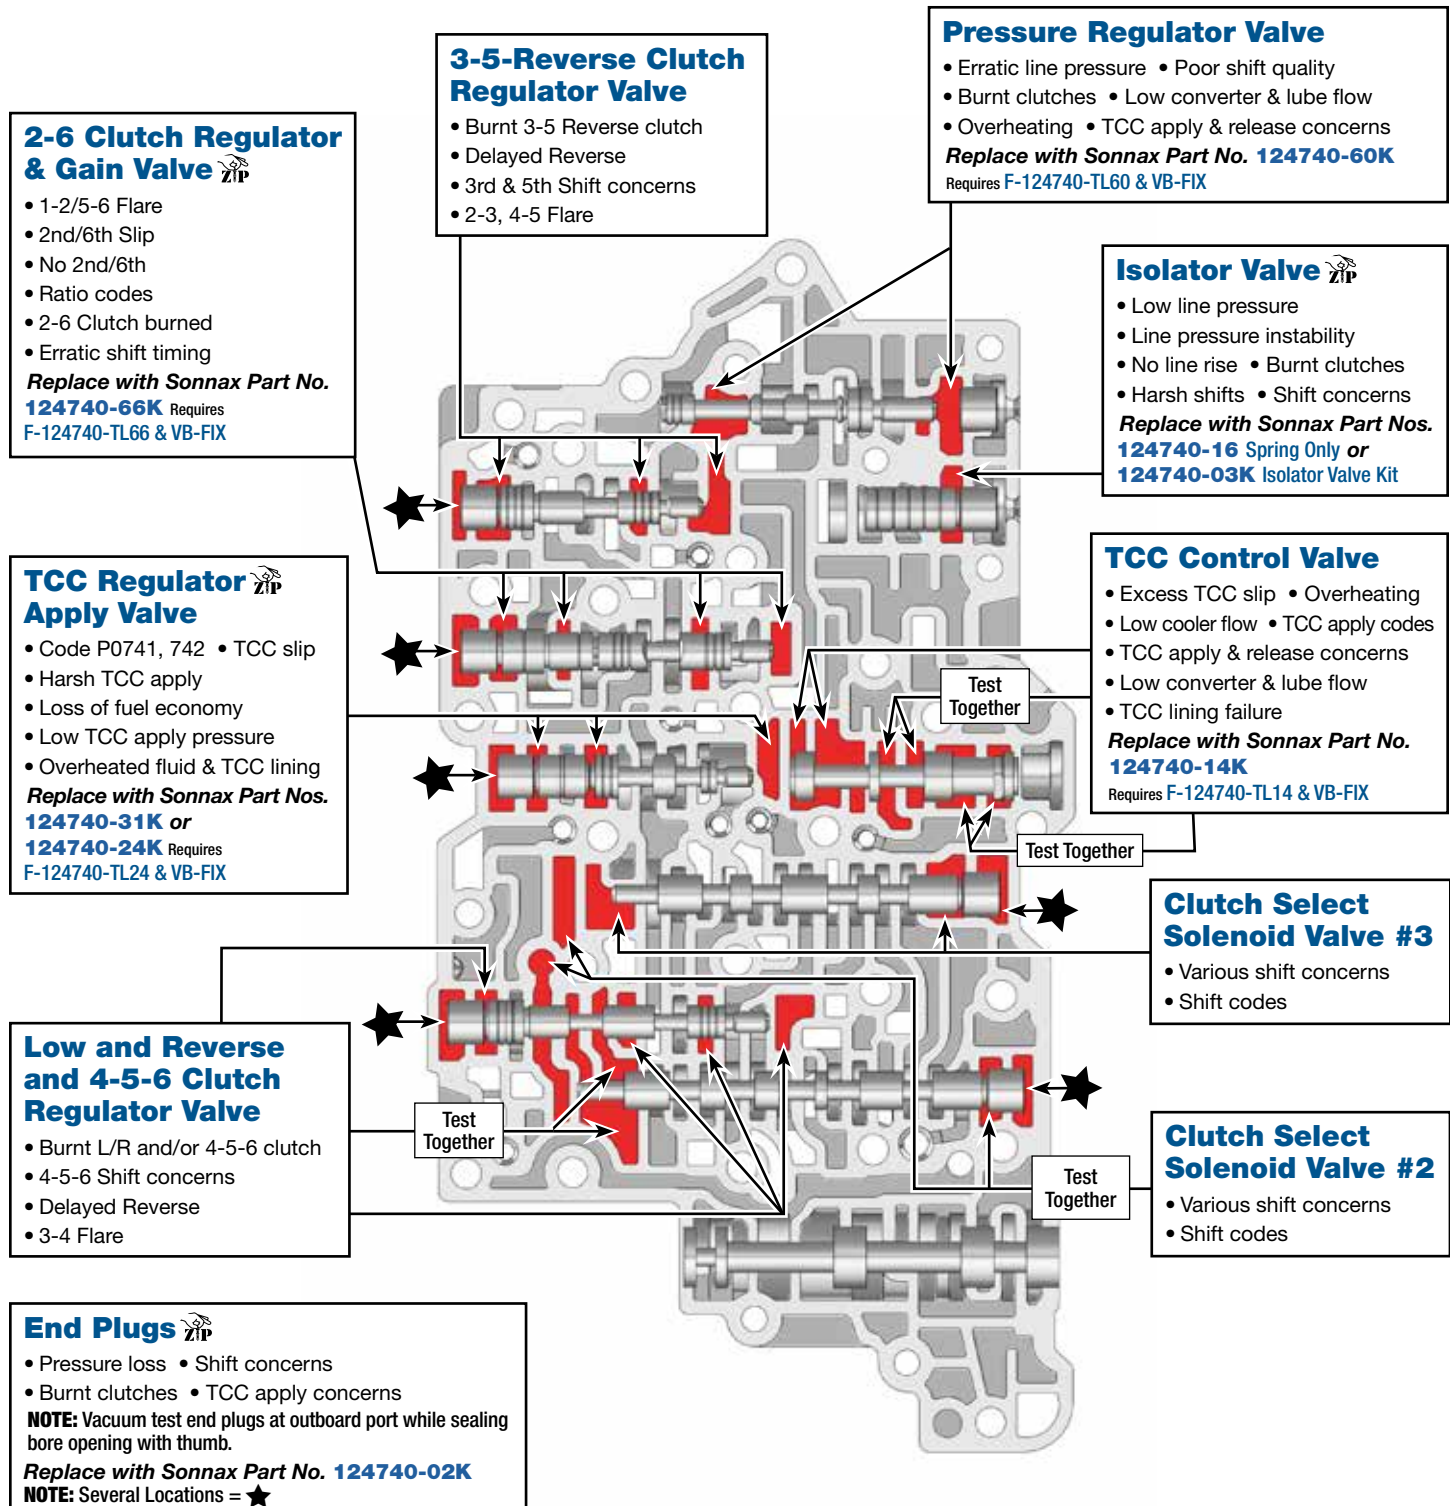


Critical Wear Areas & Vacuum Test Locations



Drop-In Zip Valve™
Parts Available

NOTE: OE valves are shown in rest position and should be tested in rest position unless otherwise indicated. Test locations are pointed to with an arrow. Springs are not shown for visual clarity. Low vacuum reading indicates wear and Sonnax parts are noted for replacement.

Lower Valve Body • 6T70 (Gen. 2)



For specific vacuum test information, refer to individual part instructions included in kits and available at www.sonnax.com.

3-5-R Clutch Boost Valve

- Shift quality is not load sensitive
- Harsh shifts • Slips & flares
- Delayed engagement • Burnt clutches
- Slide shifts • Slip codes

Replace with Sonnax Part No. 124740-56

Requires F-144740-TL22 & VB-FIX

Actuator Feed Limit Valve

- Solenoid performance codes
- Wrong gear starts • Clutch failure

Replace with Sonnax Part Nos. 124740-33K or 124740-48K

Requires F-124740-TL48 & VB-FIX

4-5-6 Clutch Boost Valve

- Shift quality is not load sensitive
- Harsh shifts • Slips & flares
- Delayed engagement • Burnt clutches
- Slide shifts • Slip codes

Replace with Sonnax Part No. 124740-56

Requires F-144740-TL22 & VB-FIX

4-5-6 Clutch Accumulator Piston

- 3-4 Flare • Ratio codes
- 4-5-6 Clutch burned
- Slipping gears • 3-4 Harsh

Replace with Sonnax Part No. 124740-57K

1-2-3-4 Clutch Boost Valve


- Shift quality is not load sensitive
- Harsh shifts • Slips & flares
- Delayed engagement
- Burnt clutches • Slide shifts
- Slip codes

Replace with Sonnax Part No. 124740-56

Requires F-144740-TL22 & VB-FIX

1-2-3-4 Clutch Regulator Valve


- Burnt 1-2-3-4 clutch
- Delayed Forward
- 1-2-3-4 Shift concerns

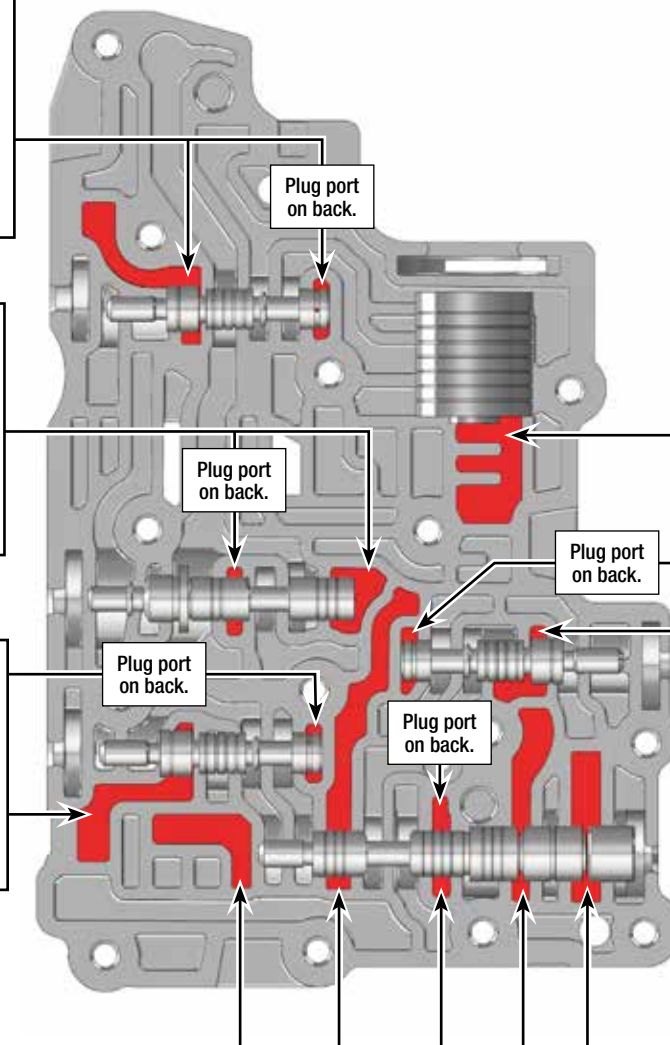

Part numbers with an asterisk () are included in this Zip Kit.

OE Exploded View


Upper Valve Body • 6T70 (Gen. 2)

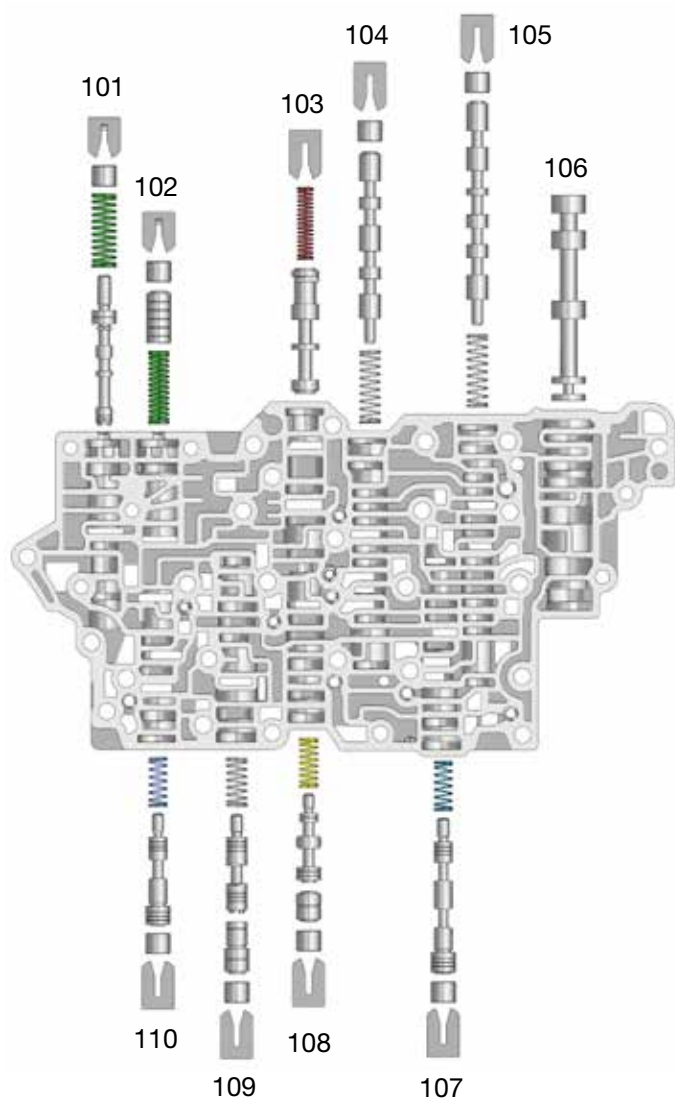

6T70 (Gen. 2) Upper Valve Body Descriptions

I.D. No.	Description
101	Pressure Regulator Valve
102	Isolator Valve
103	TCC Control Valve
104	Clutch Select Solenoid Valve #3
105	Clutch Select Solenoid Valve #2
106	Manual Valve
107	Low & Reverse & 4-5-6 Clutch Regulator Valve
108	TCC Regulator Apply Valve
109	2-6 Clutch Regulator & Gain Valve
110	3-5-Reverse Clutch Regulator Valve

Lower Valve Body • 6T70 (Gen. 2)

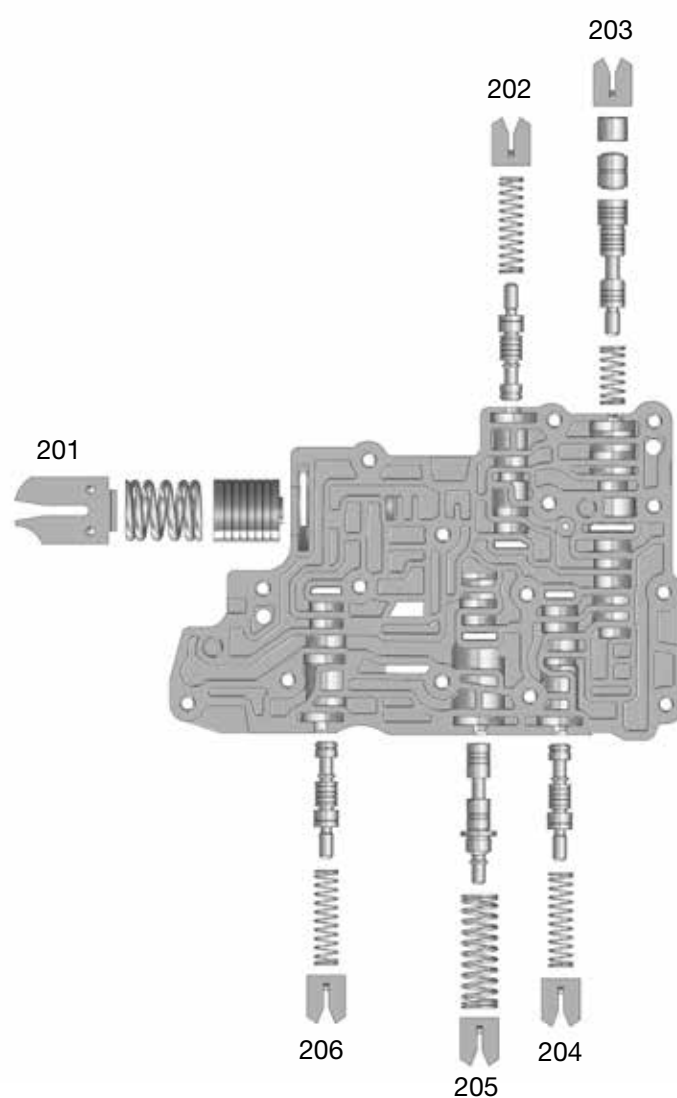

6T70 (Gen. 2) Lower Valve Body Descriptions

I.D. No.	Description
201	4-5-6 Clutch Accumulator Piston
202	1-2-3-4 Clutch Boost Valve
203	1-2-3-4 Clutch Regulator Valve
204	4-5-6 Clutch Boost Valve
205	Actuator Feed Limit Valve
206	3-5-Reverse Clutch Boost Valve

NOTE: Depending upon vehicle application, the OE springs shown may not be present.



Quality, Performance & Value You Can Trust

6-Speed Remanufactured Valve Bodies

Sonnax Quality + Verified OE Performance

Built with time-tested, industry-trusted parts and expertise from Sonnax, robust VBT 8000 testing
GUARANTEES OE performance from these valve bodies.

Newest Units!

FORD

6F50

6R140

*One valve body SKU services all '99-later
45/545RFE & 65/66/68RFE transmissions.

Chrysler 62TE

RFE Universal*

Toyota/Lexus

U660E/F

GM

Gen. 1 6T40

Gen. 1 & 2 6T70

6L45/50/80/90

Ask your distributor TODAY for a Sonnax remanufactured valve body.
See all 140+ units available for domestic and import transmissions at www.sonnax.com.

sonnax®

Visit www.sonnax.com for details. • 800-843-2600 • 802-463-9722



A Marmon/Berkshire Hathaway Company