

## A & F Dog Clutch Plunger Valve Kit


### Part No.

**85740-05K**

- Valves (2)
- Sleeves (2)

**WARNING:** Fits units with .227" dia. plunger valve only. ZF9HP48 PBW (Park by Wire) and PBC (Park by Cable) have different plunger diameters and should not be interchanged.

## Chrysler 948TE; Honda/Acura, 9-Speed; ZF9HP48

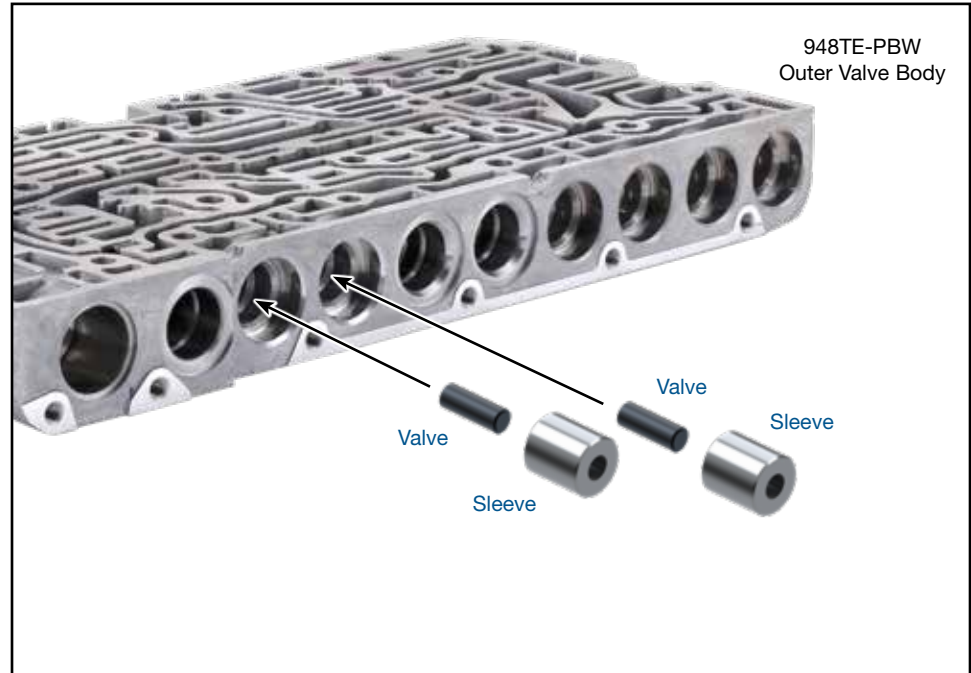

**NOTE:** You need this if visible wear or scratches are found on the I.D. of the sleeve or the O.D. of the plunger.

### 1. Disassembly

- Remove OE solenoids and set aside for reuse.
- Remove and discard OE plunger valve and sleeve assemblies.

### 2. Installation & Assembly

- Be certain all debris has been removed from the valve.
- Install Sonnax plunger and sleeve assemblies into bores.
- Reinstall OE solenoids to secure the plunger and sleeve assemblies in the bores.