

Wiring Harness Connector Bracket

Part No.


34998-01K

- Bracket
- Bolts (2)



NOTE: 4L80-E and 4L85-E units use two different wiring harness connector styles. The early style has exposed terminals and red rubber gasket. The late style has a gray plastic enclosure surrounding the terminals. The Sonnax bracket only works with the late style connector.

GM 4L80-E, 4L85-E

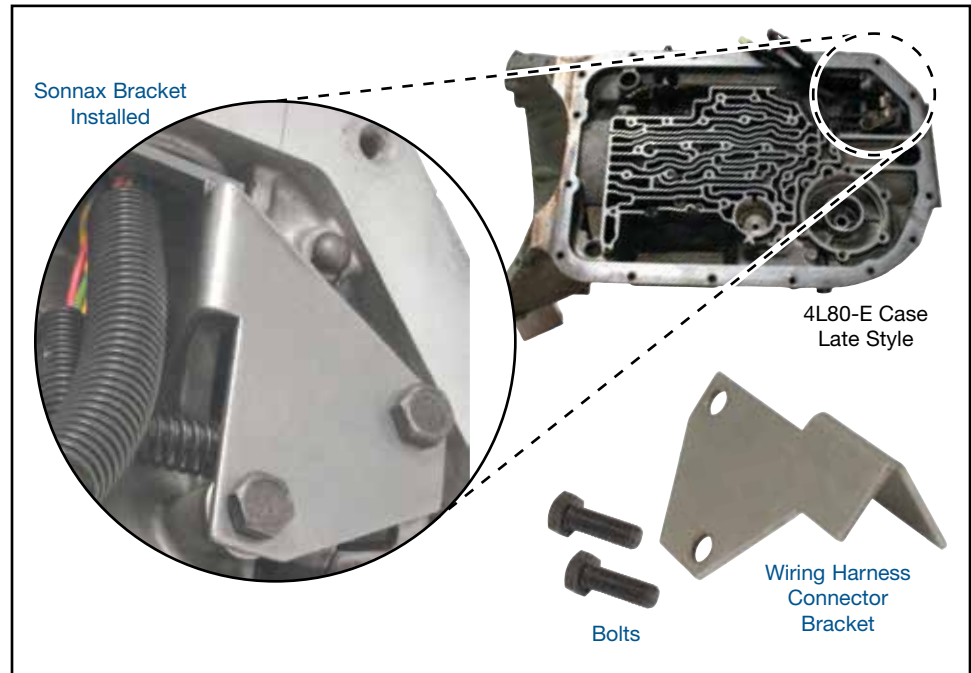

1. Disassembly

Remove OE bolts from late style case and discard.

2. Installation

- Install Sonnax bracket on top of the OE parking lever plate (*inset*).
- Secure with Sonnax bolts.