

Oversized Pressure Regulator Valve Kit

Part No.

122892-03K

- Valve
- Spring
- End Plug

Purple

Tool Kit


Part No.

F-122892-TL3

- Reamer
- Reamer Jig
- Guide Pin



Jatco/Nissan JF506E; VW/Audi 09A

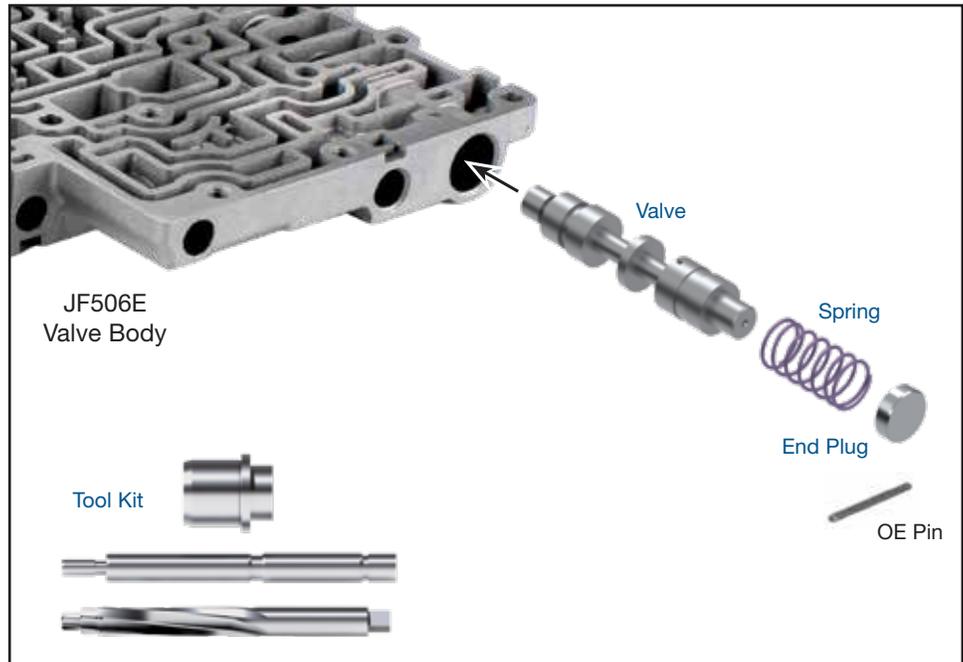

NOTE: Sonnax “F-Tool” kits designed to service a specific bore require the VB-FIX, a self-aligning valve body reaming fixture. More information and instructions can be found online at www.sonnax.com.

NOTE: These valve and tool kits also service Jatco FP series; Ford JF506E, FPH; Jaguar JF506E, FPD; Mazda JA5A-EL FPF1/FPF2; Rover JF506E, FPO; Nissan ZY units and VW/Audi AG5.

1. Disassembly

- Remove OE retaining pin and save for reuse.
- Remove OE end plug, regulator spring and regulator valve and discard.

2. Bore Reaming

Ream pressure regulator bore (for reaming instructions/reamer care, please visit www.sonnax.com). Sonnax reaming tool kit **F-122892-TL3** and **VB-FIX** are required for this operation.

3. Installation & Assembly

- Be certain all debris has been removed from the valve bore and valve body.
- Install Sonnax valve, followed by Sonnax spring and end plug.
- Reinstall OE retaining pin.