

## Oversized Main Pressure Regulator Valve Kit



**Part No.**  
**105740-21K**

- Valve
- Spring Blue, Small Dia.
- Spring Yellow, Large Dia.
- End Plug
- O-Rings (2) 1 Extra


## Tool Kit



**Part No.**  
**F-105740-TL20**

- Reamer F-105740-RM20
- Reamer F-105740-RM21
- Reamer Jig
- Guide Pin

**NOTE:** Sonnax "F-Tool" kits designed to service a specific bore require the VB-FIX, a self-aligning valve body reaming fixture. More information and instructions can be found online at [www.sonnax.com](http://www.sonnax.com).

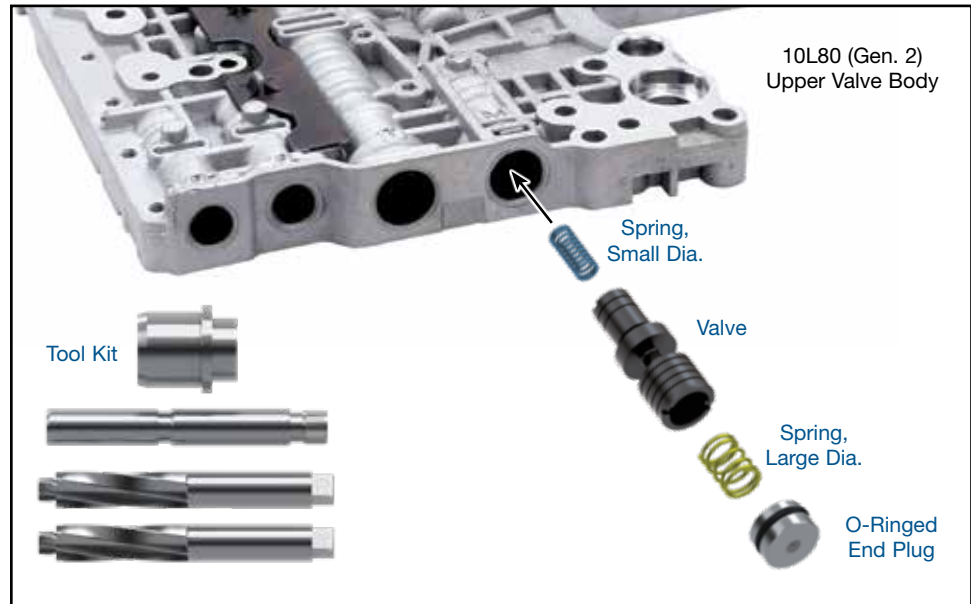

### 1. Disassembly

- Remove OE retaining clip and save for reuse.
- Remove and discard OE end plug, large diameter OE spring, OE valve and small diameter OE spring.

### 2. Bore Reaming

- Sonnax reaming tool kit **F-105740-TL20** and **VB-FIX** are required for this operation. For installation of **105740-21K**, use reamer **F-105740-RM21**.
- Ream main pressure regulator bore (for reaming instructions/reamer care, please visit [www.sonnax.com](http://www.sonnax.com)).

### 3. Installation & Assembly

- Be certain all debris has been removed from the valve bore and valve body.
- Install Sonnax small diameter, blue spring followed by Sonnax valve.
- Install Sonnax large diameter, yellow spring.

### 3. Installation & Assembly *continued*

- Install Sonnax O-ring into shallow groove of Sonnax end plug. Lubricate with Sonnax Slippery Stick **O-LUBE** and roll on bench to size the O-ring into the groove.
- Carefully insert Sonnax O-ringed end plug into the bore just far enough to reinstall the OE retainer.
- Reinstall OE retaining clip.

### 4. Final Testing

Vacuum testing at the port(s) indicated holds the recommended minimum 18 in-Hg.

