

Oversized Lockup Boost Valve Kit



Part No.

22771-19K

- Oversized Lockup Boost Valve
- Oversized Plug Valve
- Spring
- Spring Retainer

NOTE: Fits '90-later with boost oil delivery tube.

Tool Kit




Part No.

F-22771-TL19

- Reamer
- Reamer Jig
- Guide Pin

NOTE: Sonnax "F-Tool" kits designed to service a specific bore require the VB-FIX, a self-aligning valve body reaming fixture. More information and instructions can be found online at www.sonnax.com.

Chrysler 42-46-47-48RH/RE

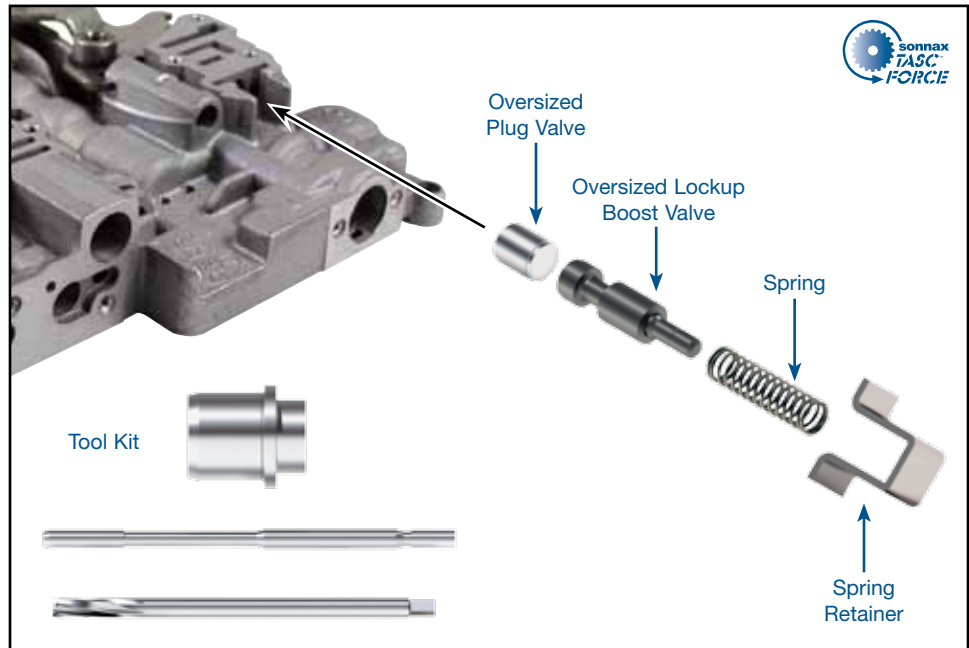

1. Disassembly

Remove and discard the OE retaining clip, spring, valve and plug valve.

2. Bore Preparation


- Clean the bore thoroughly in a solvent tank.
- Generously lubricate the bore and reamer with cutting fluid (i.e. Mobilmet S-122, Lubgard® Bio-Tap, Tap Magic™, etc.). For best results, provide a continuous flow of water-soluble cutting fluid (i.e. Mobilmet S-122) during the reaming process.
- The reamers should be turned using a low RPM, high-torque air drill regulated to a maximum of 200 RPM.
- Examine the bore after cleaning for surface finish, debris and burrs. Flashing and burrs on the exit side of land and in bores must be carefully removed. A small piece of Scotch-Brite™ material attached to a wire and powered with a drill motor is ideal for the task. Scotch-Brite™ is a very abrasive material and all residual debris must be cleaned to ensure particles do not migrate or remain imbedded into the surface. Post cleaning involves several progressive steps with solvent on a lint-free rag.

CAUTIONS AND SUGGESTIONS:

- Turning the reamer backward will dull it prematurely.
- Pushing on the reamer will result in poor surface finish and inadequate and sporadic material removal.
- Never use a crescent wrench, ratchet or pliers to turn the reamer.
- A dull reamer will cut a smaller hole. Reamers can be sharpened, but should only be done by a professional tool sharpener. Actual life of a Sonnax reamer before resharpening or replacing averages 50-70 bores.

3. Bore Reaming

Use the associated “F-Tool” F-22771-19K kit and VB-FIX reaming fixture as illustrated below to ream the bore.

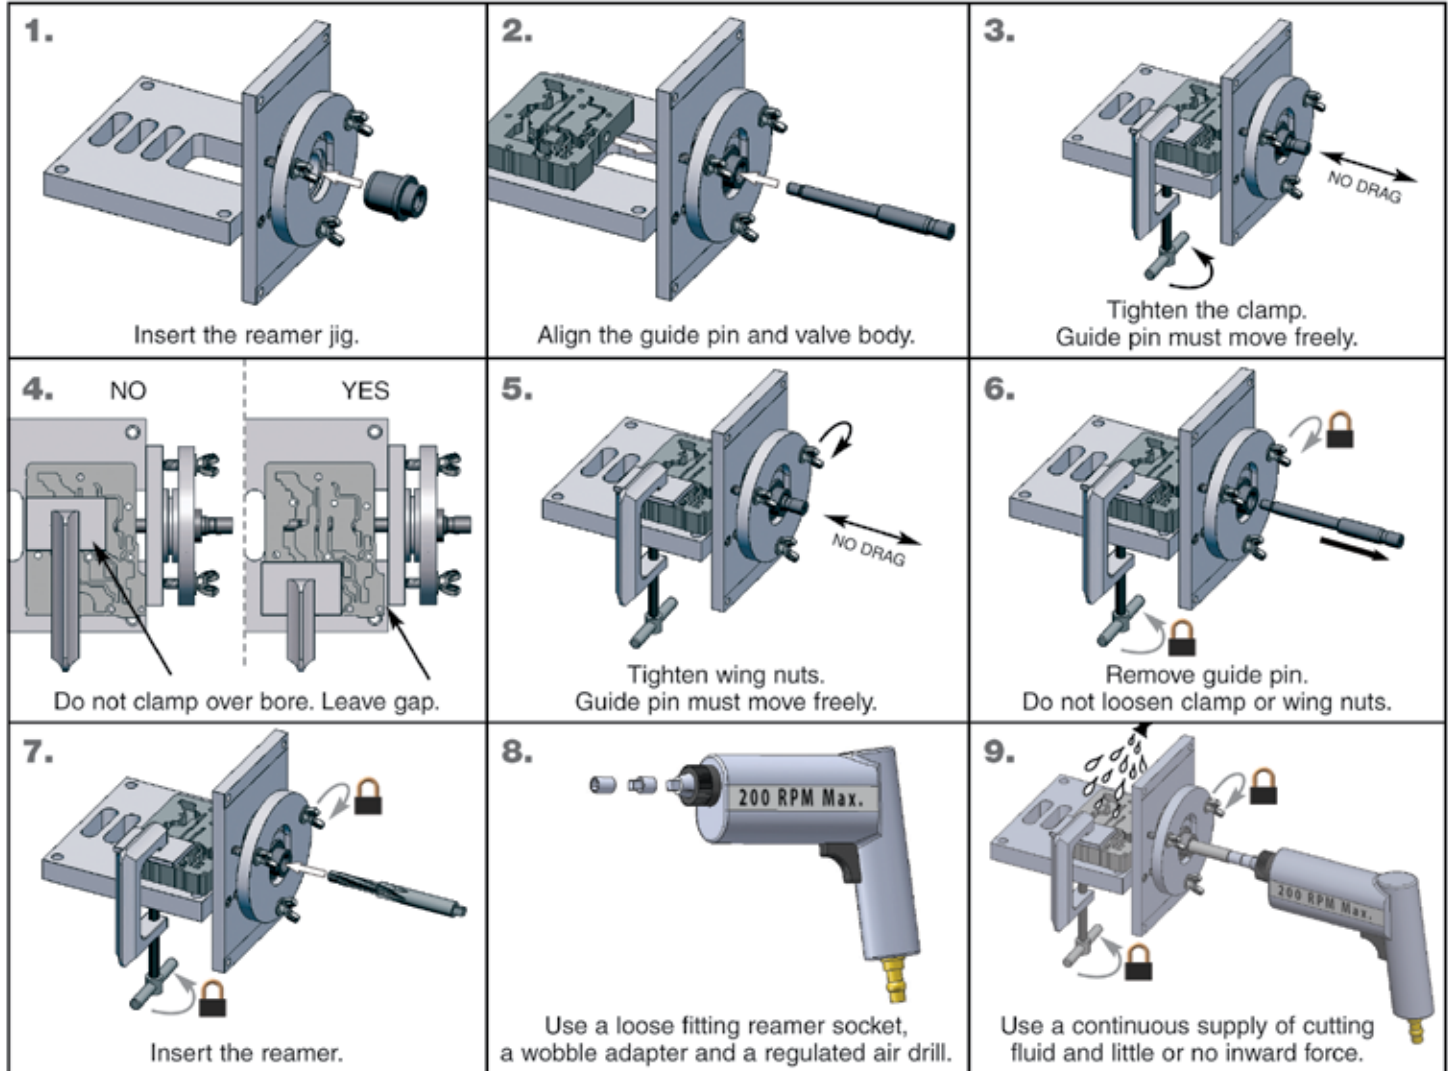

3. Installation & Assembly

1. Be certain all debris has been removed from the valve bore and valve body.
2. Install the Sonnax oversized plug valve, followed by the Sonnax oversized lock-up boost valve, with the spring guide nub facing out (illustrated on page 1).
3. Install the Sonnax spring.
4. Install the Sonnax spring retainer.

4. Final Testing

Vacuum testing should yield 18" of vacuum or higher.

